



VGA

ISO 14541 - SCREW-TO-CONNECT
COUPLINGS

Available other different threads on request

Edition. 21.5


CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 14541
- Sizes: from DN6 up to DN25
- Pressure: up to PN420
- Treatment: Galvanized


SS Stainless Steel

- Type: Quick Couplings
- Models: ISO 14541
- Sizes: from DN6 up to DN25
- Pressure: up to PN420

Male

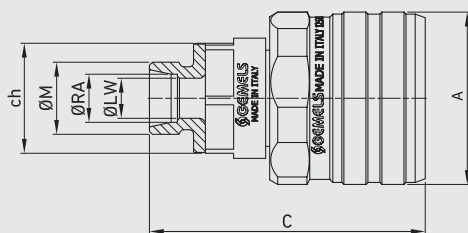

Female

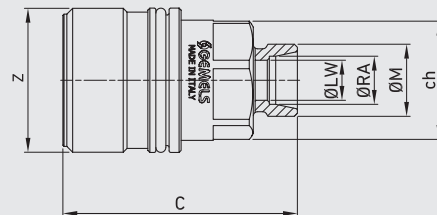


**Available also
in patented version:**
ball valve with integrated
quick coupling.



CODE DESCRIPTION STRUCTURE

					QC	1/2	1F/M	DN12,5	1	B
Type of coupling _____										
SCREW-TO-CONNECT-COUPPLINGS ISO 14541										
Ends _____										
ISO 1179-1 BSPP	ISO 8434-1-S (DIN 2353)	ISO 8434-1-L (DIN 2353)	ISO 8434-1-S (DIN 2353) BULKHEAD	ISO 8434-1-L (DIN 2353) BULKHEAD						
G1/4	8S	6L	10S	8L						
G3/8	10S	8L	12S	10L						
G1/2	12S	10L	16S	12L						
G3/4	14S	12L	20S	15L						
G1	16S	15L	25S	18L						
G1 1/4	20S	18L	30S	22L						
G1 1/2	25S	22L	38S	28L						
	30S	28L		35L						
	38S	35L		42L						
		42L								
MALE _____										
FEMALE _____										
DN/ISO _____										
6,3										
10										
12,5										
20										
25										
31,5										
Body Material _____										
● 1 = 1,0737										
● 4 = 1,4404										
Seal material _____										
● B = NBR E = FKM*										
● E = FKM										


*On request
• Plugs



SCREW-TO-CONNECT-COUPPLINGS ISO 14541 (male / female) FEMALE THREAD ISO 1179-1 BSPP

									CS Carbon Steel										SS Stainless Steel
TYPE	DN	PN	ØA	C	z	ch	ØM	WEIGHT	ITEM CODE	TYPE	DN	PN	ØA	C	z	ch	ØM	WEIGHT	ITEM CODE
QC VGA G 1/4 MALE	6,3	MPa 42	mm 30 64	-	19	G1/4	kg 0,141	NC15G010000	CS	QC VGA G 1/4 MALE	6,3	MPa 42	mm 30 64	-	19	G1/4	kg 0,141	NC15G01S000	SS
		Psi 6090	inch 1,18 2,52	-	0,75		lb 0,31					Psi 6090	inch 1,18 2,52	-	0,75		lb 0,31		
QC VGA G 1/4 FEMALE	6,3	MPa 42	mm - 60,5	M24X2	19	G1/4	kg 0,122	NC16G010000	CS	QC VGA G 1/4 FEMALE	6,3	MPa 42	mm - 53	M24X2	19	G1/4	kg 0,122	NC16G01S000	SS
		Psi 6090	inch - 2,38	M24X2	0,75		lb 0,27					Psi 6090	inch - 2,09	M24X2	0,75		lb 0,27		
QC VGA G 3/8 MALE	10	MPa 42	mm 34 66,5	-	24	G3/8	kg 0,193	NC15G020000	CS	QC VGA G 3/8 MALE	10	MPa 42	mm 34 66,5	-	24	G3/8	kg 0,193	NC15G02S000	SS
		Psi 6090	inch 1,34 2,62	-	0,94		lb 0,43					Psi 6090	inch 1,34 2,62	-	0,94		lb 0,43		
QC VGA G 3/8 FEMALE	10	MPa 42	mm - 60	M28X2	24	G3/8	kg 0,185	NC16G020000	CS	QC VGA G 3/8 FEMALE	10	MPa 42	mm - 60	M28X2	24	G3/8	kg 0,185	NC16G02S000	SS
		Psi 6090	inch - 2,36	M28X2	0,94		lb 0,41					Psi 6090	inch - 2,36	M28X2	0,94		lb 0,41		
QC VGA G 1/2 MALE	10	MPa 42	mm 34 69	-	24	G1/2	kg 0,187	NC15G020001	CS	QC VGA G 1/2 MALE	10	MPa 42	mm 34 69	-	24	G1/2	kg 0,187	NC15G02S001	SS
		Psi 6090	inch 1,34 2,72	-	0,94		lb 0,41					Psi 6090	inch 1,34 2,72	-	0,94		lb 0,41		
QC VGA G 1/2 FEMALE	10	MPa 42	mm - 62,5	M28X2	24	G1/2	kg 0,171	NC16G020001	CS	QC VGA G 1/2 FEMALE	10	MPa 42	mm - 62,5	M28X2	24	G1/2	kg 0,171	NC16G02S001	SS
		Psi 6090	inch - 2,46	M28X2	0,94		lb 0,38					Psi 6090	inch - 2,46	M28X2	0,94		lb 0,38		
QC VGA G 3/8 MALE	12,5	MPa 42	mm 43 71	-	27	G3/8	kg 0,309	NC15G030000	CS	QC VGA G 3/8 MALE	12,5	MPa 42	mm 43 71	-	27	G3/8	kg 0,309	NC15G03S000	SS
		Psi 6090	inch 1,69 2,80	-	1,06		lb 0,68					Psi 6090	inch 1,69 2,80	-	1,06		lb 0,68		
QC VGA G 3/8 FEMALE	12,5	MPa 42	mm - 60,5	M36X2	27	G3/8	kg 0,311	NC16G030000	CS	QC VGA G 3/8 FEMALE	12,5	MPa 42	mm - 60,5	M36X2	27	G3/8	kg 0,311	NC16G03S000	SS
		Psi 6090	inch - 2,38	M36X2	1,06		lb 0,69					Psi 6090	inch - 2,38	M36X2	1,06		lb 0,69		
QC VGA G 1/2 MALE	12,5	MPa 42	mm 43 74	-	27	G1/2	kg 0,303	NC15G030001	CS	QC VGA G 1/2 MALE	12,5	MPa 42	mm 43 74	-	27	G1/2	kg 0,303	NC15G03S001	SS
		Psi 6090	inch 1,69 2,91	-	1,06		lb 0,67					Psi 6090	inch 1,69 2,91	-	1,06		lb 0,67		
QC VGA G 1/2 FEMALE	12,5	MPa 42	mm - 63,5	M36X2	27	G1/2	kg 0,306	NC16G030001	CS	QC VGA G 1/2 FEMALE	12,5	MPa 42	mm - 63,5	M36X2	27	G1/2	kg 0,306	NC16G03S001	SS
		Psi 6090	inch - 2,50	M36X2	1,06		lb 0,67					Psi 6090	inch - 2,50	M36X2	1,06		lb 0,67		
QC VGA G 3/4 MALE	20	MPa 42	mm 48 85	-	34	G3/4	kg 0,44	NC15G040000	CS	QC VGA G 3/4 MALE	20	MPa 42	mm 48 85	-	34	G3/4	kg 0,44	NC15G04S000	SS
		Psi 6090	inch 1,89 3,35	-	1,34		lb 0,97					Psi 6090	inch 1,89 3,35	-	1,34		lb 0,97		
QC VGA G 3/4 FEMALE	20	MPa 42	mm - 84	M42X2	34	G3/4	kg 0,517	NC16G040000	CS	QC VGA G 3/4 FEMALE	20	MPa 42	mm - 84	M42X2	34	G3/4	kg 0,517	NC16G04S000	SS
		Psi 6090	inch - 3,31	M42X2	1,34		lb 1,14					Psi 6090	inch - 3,31	M42X2	1,34		lb 1,14		
QC VGA G 3/4 MALE	25	MPa 35	mm 57 98,5	-	41	G3/4	kg 0,758	NC15G050000	CS	QC VGA G 3/4 MALE	25	MPa 35	mm 57 98,5	-	41	G3/4	kg 0,758	NC15G05S000	SS
		Psi 5075	inch 2,24 3,88	-	1,61		lb 1,67					Psi 5075	inch 2,24 3,88	-	1,61		lb 1,67		
QC VGA G 3/4 FEMALE	25	MPa 35	mm - 95	M48X2	41	G3/4	kg 0,75	NC16G050000	CS	QC VGA G 3/4 FEMALE	25	MPa 35	mm - 95	M48X2	41	G3/4	kg 0,75	NC16G05S000	SS
		Psi 5075	inch - 3,74	M48X2	1,61		lb 1,65					Psi 5075	inch - 3,74	M48X2	1,61		lb 1,65		
QC VGA G 1 MALE	31,5	MPa 35	mm 57 100,5	-	41	G1	kg 0,737	NC15G050001	CS	QC VGA G 1 MALE	31,5	MPa 35	mm 57 100,5	-	41	G1	kg 0,737	NC15G05S001	SS
		Psi 5075	inch 2,24 3,96	-	1,61		lb 1,62					Psi 5075	inch 2,24 3,96	-	1,61		lb 1,62		
QC VGA G 1 FEMALE	31,5	MPa 35	mm - 97	M48X2	41	G1	kg 0,728	NC16G050001	CS	QC VGA G 1 FEMALE	31,5	MPa 35	mm - 97	M48X2	41	G1	kg 0,728	NC16G05S001	SS
		Psi 5075	inch - 3,82	M48X2	1,61		lb 1,60					Psi 5075	inch - 3,82	M48X2	1,61		lb 1,60		
QC VGA G1 1/4 MALE	31,5	MPa 30	mm 85 115	-	55	G1 1/4	kg 2,131	NC15G060000	CS	QC VGA G1 1/4 MALE	31,5	MPa 30	mm 85 115	-	55	G1 1/4	kg 2,131	NC15G06S000	SS
		Psi 4350	inch 3,35 4,53	-	2,17		lb 4,70					Psi 4350	inch 3,35 4,53	-	2,17		lb 4,70		
QC VGA G1 1/4 FEMALE	31,5	MPa 30	mm - 112	M70X3	55	G1 1/4	kg 1,676	NC16G060000	CS	QC VGA G1 1/4 FEMALE	31,5	MPa 30	mm - 112	M70X3	55	G1 1/4	kg 1,676	NC16G06S000	SS
		Psi 4350	inch - 4,41	M70X3	2,17		lb 3,69					Psi 4350	inch - 4,41	M70X3	2,17		lb 3,69		
QC VGA G1 1/2 MALE	31,5	MPa 30	mm 85 115	-	55	G1 1/2	kg 2,052	NC15G060001	CS	QC VGA G1 1/2 MALE	31,5	MPa 30	mm 85 115	-	55	G1 1/2	kg 2,052	NC15G06S001	SS
		Psi 4350	inch 3,35 4,53	-	0,00		lb 4,52					Psi 4350	inch 3,35 4,53	-	0,00		lb 4,52		
QC VGA G1 1/2 FEMALE	31,5	MPa 30	mm - 112	M70X3	55	G1 1/2	kg 2	NC16G060001	CS	QC VGA G1 1/2 FEMALE	31,5	MPa 30	mm - 112	M70X3	55	G1 1/2	kg 2	NC16G06S001	SS
		Psi 4350	inch - 4,41	M70X3	2,17		lb 3,52					Psi 4350	inch - 4,41	M70X3	2,17		lb 3,52		






SCREW-TO-CONNECT-COUPPLINGS ISO 14541 (male / female)
MALE THREAD METRIC ISO 8434-1-S (DIN 2353)

CS

Carbon Steel


TYPE	DN	PN	ØA	C	z	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC VGA 8S MALE	10	MPa 42	mm 34	69	-	24	M16X1,5	5	8	kg 0,169	NC15H020000
		Psi 6090	inch 1,34	2,72		0,94		0,20	0,31	lb 0,37	
QC VGA 8S FEMALE		MPa 42	mm -	62,5	M28X2	24	M16X1,5	5	8	kg 0,172	NC16H020000
		Psi 6090	inch -	2,46		0,94		0,20	0,31	lb 0,38	
QC VGA 10S MALE	10	MPa 42	mm 34	69	-	24	M18X1,5	7	10	kg 0,169	NC15H020001
		Psi 6090	inch 1,34	2,72		0,94		0,28	0,39	lb 0,37	
QC VGA 10S FEMALE		MPa 42	mm -	62,5	M28X2	24	M18X1,5	7	10	kg 0,158	NC16H020001
		Psi 6090	inch -	2,46		0,94		0,28	0,39	lb 0,35	
QC VGA 12S MALE	12,5	MPa 42	mm 43	70	-	27	M20X1,5	8	12	kg 0,251	NC15H030000
		Psi 6090	inch 1,69	2,76		1,06		0,31	0,47	lb 0,55	
QC VGA 12S FEMALE		MPa 42	mm -	59,5	M36X2	27	M20X1,5	8	12	kg 0,254	NC16H030000
		Psi 6090	inch -	2,34		1,06		0,31	0,47	lb 0,56	
QC VGA 14S MALE		MPa 42	mm 43	72	-	27	M22X1,5	8	14	kg 0,26	NC15H030001
		Psi 6090	inch 1,69	2,83		1,06		0,31	0,55	lb 0,57	
QC VGA 14S FEMALE		MPa 42	mm -	61,5	M36X2	27	M22X1,5	8	14	kg 0,258	NC16H030001
		Psi 6090	inch -	2,42		1,06		0,31	0,55	lb 0,57	
QC VGA 16S MALE		MPa 42	mm 43	72	-	27	M24X1,5	12	16	kg 0,281	NC15H030002
		Psi 6090	inch 1,69	2,83		1,06		0,47	0,63	lb 0,62	
QC VGA 16S FEMALE		MPa 42	mm -	61,5	M36X2	27	M24X1,5	12	16	kg 0,278	NC16H030002
		Psi 6090	inch -	2,42		1,06		0,47	0,63	lb 0,61	
QC VGA 16S MALE	20	MPa 42	mm 48	79	-	34	M24X1,5	12	16	kg 0,374	NC15H040000
		Psi 6090	inch 1,89	3,11		1,34		0,47	0,63	lb 0,82	
QC VGA 16S FEMALE		MPa 42	mm -	78	M42X2	34	M24X1,5	12	16	kg 0,266	NC16H040000
		Psi 6090	inch -	3,07		1,34		0,47	0,63	lb 0,59	
QC VGA 20S MALE		MPa 42	mm 48	81	-	34	M30X2	16	20	kg 0,383	NC15H040001
		Psi 6090	inch 1,89	3,19		1,34		0,63	0,79	lb 0,84	
QC VGA 20S FEMALE		MPa 42	mm -	80	M42X2	34	M30X2	16	20	kg 0,436	NC16H040001
		Psi 6090	inch -	3,15		1,34		0,63	0,79	lb 0,96	
QC VGA 20S MALE	25	MPa 35	mm 57	100,5	-	41	M30X2	16	20	kg 0,723	NC15H050000
		Psi 5075	inch 2,24	3,96		1,61		0,63	0,79	lb 1,59	
QC VGA 20S FEMALE		MPa 35	mm -	97	M48x2	41	M30X2	16	20	kg 0,721	NC16H050000
		Psi 5075	inch -	3,82		1,61		0,63	0,79	lb 1,59	
QC VGA 25S MALE		MPa 35	mm 57	102,5	-	41	M36X2	20	25	kg 0,742	NC15H050001
		Psi 5075	inch 2,24	4,04		1,61		0,79	0,98	lb 1,64	
QC VGA 25S FEMALE		MPa 35	mm -	99	M48x2	41	M36X2	20	25	kg 0,74	NC16H050001
		Psi 5075	inch -	3,90		1,61		0,79	0,98	lb 1,63	
QC VGA 30S MALE		MPa 35	mm 57	104,5	-	46	M42X2	25	30	kg 0,821	NC15H050002
		Psi 5075	inch 2,24	4,11		1,81		0,98	1,18	lb 1,81	
QC VGA 30S FEMALE		MPa 35	mm -	101	M48x2	46	M42X2	25	30	kg 0,813	NC16H050002
		Psi 5075	inch -	3,98		1,81		0,98	1,18	lb 1,79	
QC VGA 30S MALE	31,5	MPa 30	mm 85	118	-	55	M42X2	25	30	kg 2,097	NC15H060000
		Psi 4350	inch 3,35	4,65		2,17		0,98	1,18	lb 4,62	
QC VGA 30S FEMALE		MPa 30	mm -	114,5	M70X3	55	M42X2	25	30	kg 1,642	NC16H060000
		Psi 4350	inch -	4,51		2,17		0,98	1,18	lb 3,62	
QC VGA 38S MALE		MPa 30	mm 85	120	-	55	M52X2	32	38,3	kg 2,153	NC15H060001
		Psi 4350	inch 3,35	4,72		2,17		1,26	1,51	lb 4,75	
QC VGA 38S FEMALE		MPa 30	mm -	116,5	M70X3	55	M52X2	32	38,3	kg 1,698	NC16H060001
		Psi 4350	inch -	4,59		2,17		1,26	1,51	lb 3,74	



SCREW-TO-CONNECT-COUPPLINGS ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-S (DIN 2353)

CS
Carbon Steel

TYPE	DN	PN	ØA	C	z	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC VGA 8S MALE	10	MPa 42	mm 34	69	M28X2	24	M16X1,5	5	8	kg 0,169	NC15H02S000
		Psi 6090	inch 1,34	2,72		0,94		0,20	0,31	lb 0,37	
QC VGA 8S FEMALE		MPa 42	mm -	62,5		24		5	8	kg 0,172	NC16H02S000
		Psi 6090	inch -	2,46		0,94		0,20	0,31	lb 0,38	
QC VGA 10S MALE	10	MPa 42	mm 34	69	M28X2	24	M18X1,5	7	10	kg 0,169	NC15H02S001
		Psi 6090	inch 1,34	2,72		0,94		0,28	0,39	lb 0,37	
QC VGA 10S FEMALE		MPa 42	mm -	62,5		24		7	10	kg 0,158	NC16H02S001
		Psi 6090	inch -	2,46		0,94		0,28	0,39	lb 0,35	
QC VGA 12S MALE	12,5	MPa 42	mm 43	70	M36X2	27	M20X1,5	8	12	kg 0,251	NC15H03S000
		Psi 6090	inch 1,69	2,76		1,06		0,31	0,47	lb 0,55	
QC VGA 12S FEMALE		MPa 42	mm -	59,5		27		8	12	kg 0,254	NC16H03S000
		Psi 6090	inch -	2,34		1,06		0,31	0,47	lb 0,56	
QC VGA 14S MALE	12,5	MPa 42	mm 43	72	M36X2	27	M22X1,5	8	14	kg 0,26	NC15H03S001
		Psi 6090	inch 1,69	2,83		1,06		0,31	0,55	lb 0,57	
QC VGA 14S FEMALE		MPa 42	mm -	61,5		27		8	14	kg 0,258	NC16H03S001
		Psi 6090	inch -	2,42		1,06		0,31	0,55	lb 0,57	
QC VGA 16S MALE	20	MPa 42	mm 43	72	M36X2	27	M24X1,5	12	16	kg 0,281	NC15H03S002
		Psi 6090	inch 1,69	2,83		1,06		0,47	0,63	lb 0,62	
QC VGA 16S FEMALE		MPa 42	mm -	61,5		27		12	16	kg 0,278	NC16H03S002
		Psi 6090	inch -	2,42		1,06		0,47	0,63	lb 0,61	
QC VGA 16S MALE	20	MPa 42	mm 48	79	M42X2	34	M24X1,5	12	16	kg 0,374	NC15H04S000
		Psi 6090	inch 1,89	3,11		1,34		0,47	0,63	lb 0,82	
QC VGA 16S FEMALE		MPa 42	mm -	78		34		12	16	kg 0,266	NC16H04S000
		Psi 6090	inch -	3,07		1,34		0,47	0,63	lb 0,59	
QC VGA 20S MALE	20	MPa 42	mm 48	81	M42X2	34	M30X2	16	20	kg 0,383	NC15H04S001
		Psi 6090	inch 1,89	3,19		1,34		0,63	0,79	lb 0,84	
QC VGA 20S FEMALE		MPa 42	mm -	80		34		16	20	kg 0,436	NC16H04S001
		Psi 6090	inch -	3,15		1,34		0,63	0,79	lb 0,96	
QC VGA 20S MALE	25	MPa 35	mm 57	100,5	M48x2	41	M30X2	16	20	kg 0,723	NC15H05S000
		Psi 5075	inch 2,24	3,96		1,61		0,63	0,79	lb 1,59	
QC VGA 20S FEMALE		MPa 35	mm -	97		41		16	20	kg 0,721	NC16H05S000
		Psi 5075	inch -	3,82		1,61		0,63	0,79	lb 1,59	
QC VGA 25S MALE	25	MPa 35	mm 57	102,5	M48x2	41	M36X2	20	25	kg 0,742	NC15H05S001
		Psi 5075	inch 2,24	4,04		1,61		0,79	0,98	lb 1,64	
QC VGA 25S FEMALE		MPa 35	mm -	99		41		20	25	kg 0,74	NC16H05S001
		Psi 5075	inch -	3,90		1,61		0,79	0,98	lb 1,63	
QC VGA 30S MALE	31,5	MPa 35	mm 57	104,5	M48x2	46	M42X2	25	30	kg 0,821	NC15H05S002
		Psi 5075	inch 2,24	4,11		1,81		0,98	1,18	lb 1,81	
QC VGA 30S FEMALE		MPa 35	mm -	101		46		25	30	kg 0,813	NC16H05S002
		Psi 5075	inch -	3,98		1,81		0,98	1,18	lb 1,79	
QC VGA 30S MALE	31,5	MPa 30	mm 85	118	M70X3	55	M52X2	25	30	kg 2,097	NC15H06S000
		Psi 4350	inch 3,35	4,65		2,17		0,98	1,18	lb 4,62	
QC VGA 30S FEMALE		MPa 30	mm -	114,5		55		25	30	kg 1,642	NC16H06S000
		Psi 4350	inch -	4,51		2,17		0,98	1,18	lb 3,62	
QC VGA 38S MALE	31,5	MPa 30	mm 85	120	M70X3	55	M52X2	32	38,3	kg 2,153	NC15H06S001
		Psi 4350	inch 3,35	4,72		2,17		1,26	1,51	lb 4,75	
QC VGA 38S FEMALE		MPa 30	mm -	116,5		55		32	38,3	kg 1,698	NC16H06S001
		Psi 4350	inch -	4,59		2,17		1,26	1,51	lb 3,74	




SCREW-TO-CONNECT-COUPPLINGS ISO 14541 (male / female)
MALE THREAD METRIC ISO 8434-1-L (DIN 2353)

CS

Carbon Steel


TYPE	DN	PN	ØA	C	z	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC VGA 8L MALE	6.3	MPa 42	mm 30	61	-	19	M14X1,5	6	8	kg 0,114	NC15L010000
		Psi 6090	inch 1,18	2,40		0,00		0,24	0,31	lb 0,25	
QC VGA 8L FEMALE		MPa 42	mm -	57,5	M24X2	19	M14X1,5	6	8	kg 0,1	NC16L010000
		Psi 6090	inch -	2,26		0,75		0,24	0,31	lb 0,22	
QC VGA 6L MALE		MPa 42	mm 34	67	-	24	M12X1,5	4	6	kg 0,19	NC15L020000
		Psi 6090	inch 1,34	2,64		0,00		0,16	0,24	lb 0,42	
QC VGA 6L FEMALE		MPa 42	mm -	60,5	M28X2	24	M12X1,5	4	6	kg 0,166	NC16L020000
		Psi 6090	inch -	2,38		0,94		0,16	0,24	lb 0,37	
QC VGA 8L MALE		MPa 42	mm 34	67	-	24	M14X1,5	6	8	kg 0,165	NC15L020001
		Psi 6090	inch 1,34	2,64		0,00		0,24	0,31	lb 0,36	
QC VGA 8L FEMALE		MPa 42	mm -	60,5	M28X2	24	M14X1,5	6	8	kg 0,167	NC16L020001
		Psi 6090	inch -	2,38		0,94		0,24	0,31	lb 0,37	
QC VGA 10L MALE		MPa 42	mm 34	68	-	24	M16X1,5	8	10	kg 0,166	NC15L020002
		Psi 6090	inch 1,34	2,68		0,00		0,31	0,39	lb 0,37	
QC VGA 10L FEMALE		MPa 42	mm -	61,5	M28X2	24	M16X1,5	8	10	kg 0,173	NC16L020002
		Psi 6090	inch -	2,42		0,94		0,31	0,39	lb 0,38	
QC VGA 10L MALE		MPa 42	mm 43	69	-	27	M16X1,5	8	10	kg 0,247	NC15L030000
		Psi 6090	inch 1,69	2,72		0,00		0,31	0,39	lb 0,54	
QC VGA 10L FEMALE		MPa 42	mm -	58,5	M36X2	27	M16X1,5	8	10	kg 0,27	NC16L030000
		Psi 6090	inch -	2,30		1,06		0,31	0,39	lb 0,60	
QC VGA 12L MALE		MPa 42	mm 43	69	-	27	M18X1,5	10	12	kg 0,247	NC15L030001
		Psi 6090	inch 1,69	2,72		0,00		0,39	0,47	lb 0,54	
QC VGA 12L FEMALE		MPa 42	mm -	58,5	M36X2	27	M18X1,5	10	12	kg 0,25	NC16L030001
		Psi 6090	inch -	2,30		1,06		0,39	0,47	lb 0,55	
QC VGA 15L MALE		MPa 42	mm 43	70	-	27	M22X1,5	12	15	kg 0,253	NC15L030002
		Psi 6090	inch 1,69	2,76		0,00		0,47	0,59	lb 0,56	
QC VGA 15L FEMALE		MPa 42	mm -	59,5	M36X2	27	M22X1,5	12	15	kg 0,251	NC16L030002
		Psi 6090	inch -	2,34		1,06		0,47	0,59	lb 0,55	
QC VGA 18L MALE		MPa 42	mm 43	70	-	27	M26X1,5	15	18	kg 0,258	NC15L030003
		Psi 6090	inch 1,69	2,76		0,00		0,59	0,71	lb 0,57	
QC VGA 18L FEMALE		MPa 42	mm -	59,5	M36X2	27	M26X1,5	15	18	kg 0,261	NC16L030003
		Psi 6090	inch -	2,34		1,06		0,59	0,71	lb 0,58	



SCREW-TO-CONNECT-COUPPLINGS ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-L (DIN 2353)

CS
Carbon Steel


TYPE	DN	PN	ØA	C	z	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC VGA 18L MALE	20	MPa 42	mm 48	77	-	34	M26X1,5	15	18	kg 0,372	NC15L040000
		Psi 6090	inch 1,89	3,03		0,00		1,34	0,59	lb 0,82	
QC VGA 18L FEMALE		MPa 42	mm -	76	M42X2	34	M26X1,5	15	18	kg 0,424	NC16L040000
		Psi 6090	inch -	2,99		1,34		0,59	0,71	lb 0,93	
QC VGA 22L MALE		MPa 42	mm 48	79	-	34	M30X2	19	22	kg 0,375	NC15L040001
		Psi 6090	inch 1,89	3,11		0,00		1,34	0,75	lb 0,83	
QC VGA 22L FEMALE		MPa 42	mm -	78	M42X2	34	M30X2	19	22	kg 0,854	NC16L040001
		Psi 6090	inch -	3,07		1,34		0,75	0,87	lb 1,88	
QC VGA 22L MALE	25	MPa 35	mm 57	98,5	-	41	M30X2	19	22	kg 0,708	NC15L050000
		Psi 5075	inch 2,24	3,88		0,00		1,61	0,75	lb 1,56	
QC VGA 22L FEMALE		MPa 35	mm -	95	M48X2	41	M30X2	19	22	kg 0,701	NC16L050000
		Psi 5075	inch -	3,74		1,61		0,75	0,87	lb 1,55	
QC VGA 28L MALE		MPa 35	mm 57	98,5	-	41	M36X2	24	28	kg 0,707	NC15L050001
		Psi 5075	inch 2,24	3,88		0,00		1,61	0,94	lb 1,56	
QC VGA 28L FEMALE		MPa 35	mm -	95	M48X2	41	M36X2	24	28	kg 0,7	NC16L050001
		Psi 5075	inch -	3,74		1,61		0,94	1,10	lb 1,54	
QC VGA 35L MALE		MPa 35	mm 57	100	-	46	M45X2	30	35	kg 0,784	NC15L050002
		Psi 5075	inch 2,24	3,94		0,00		1,81	1,18	lb 1,73	
QC VGA 35L FEMALE		MPa 35	mm -	97	M48X2	46	M45X2	30	35	kg 0,777	NC16L050002
		Psi 5075	inch -	3,82		1,81		0,00	1,38	lb 1,71	
QC VGA 35L MALE	31,5	MPa 30	mm 85	114	-	55	M45X2	30	35	kg 2,078	NC15L060000
		Psi 4350	inch 3,35	4,49		0,00		2,17	1,18	lb 4,58	
QC VGA 35L FEMALE		MPa 30	mm -	111	M70X3	55	M45X2	30	35	kg 1,623	NC16L060000
		Psi 4350	inch -	4,37		2,17		1,18	1,38	lb 3,58	
QC VGA 42L MALE		MPa 30	mm 85	114	-	55	M52X2	36	42	kg 2,15	NC15L060001
		Psi 4350	inch 3,35	4,49		0,00		2,17	1,42	lb 4,74	
QC VGA 42L FEMALE		MPa 30	mm -	111	M70X3	55	M52X2	36	42	kg 1,773	NC16L060001
		Psi 4350	inch -	4,37		2,17		1,42	1,65	lb 3,91	



SCREW-TO-CONNECT-COUPPLINGS ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-L (DIN 2353)

CS
Carbon Steel


TYPE	DN	PN	ØA	C	z	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC VGA 8L MALE	6.3	MPa 42	mm 30	61	-	19	M14X1,5	6	8	kg 0,114	NC15L01S000
		Psi 6090	inch 1,18	2,40		0,00		0,24	0,31	lb 0,25	
QC VGA 8L FEMALE		MPa 42	mm -	50,5	M24X2	19	M14X1,5	6	8	kg 0,1	NC16L01S000
		Psi 6090	inch -	1,99		0,75		0,24	0,31	lb 0,22	
QC VGA 6L MALE	10	MPa 42	mm 34	67	-	24	M12X1,5	4	6	kg 0,19	NC15L02S000
		Psi 6090	inch 1,34	2,64		0,00		0,16	0,24	lb 0,42	
QC VGA 6L FEMALE		MPa 42	mm -	60,5	M28X2	24	M12X1,5	4	6	kg 0,166	NC16L02S000
		Psi 6090	inch -	2,38		0,94		0,16	0,24	lb 0,37	
QC VGA 8L MALE		MPa 42	mm 34	67	-	24	M14X1,5	6	8	kg 0,165	NC15L02S001
		Psi 6090	inch 1,34	2,64		0,00		0,24	0,31	lb 0,36	
QC VGA 8L FEMALE		MPa 42	mm -	60,5	M28X2	24	M14X1,5	6	8	kg 0,167	NC16L02S001
		Psi 6090	inch -	2,38		0,94		0,24	0,31	lb 0,37	
QC VGA 10L MALE		MPa 42	mm 34	68	-	24	M16X1,5	8	10	kg 0,166	NC15L02S002
		Psi 6090	inch 1,34	2,68		0,00		0,31	0,39	lb 0,37	
QC VGA 10L FEMALE		MPa 42	mm -	61,5	M28X2	24	M16X1,5	8	10	kg 0,173	NC16L0S0002
		Psi 6090	inch -	2,42		0,94		0,31	0,39	lb 0,38	
QC VGA 10L MALE	12,5	MPa 42	mm 43	69	-	27	M16X1,5	8	10	kg 0,247	NC15L03S000
		Psi 6090	inch 1,69	2,72		0,00		0,31	0,39	lb 0,54	
QC VGA 10L FEMALE		MPa 42	mm -	58,5	M36X2	27	M16X1,5	8	10	kg 0,27	NC16L03S000
		Psi 6090	inch -	2,30		1,06		0,31	0,39	lb 0,60	
QC VGA 12L MALE		MPa 42	mm 43	69	-	27	M18X1,5	10	12	kg 0,247	NC15L03S001
		Psi 6090	inch 1,69	2,72		0,00		0,39	0,47	lb 0,54	
QC VGA 12L FEMALE		MPa 42	mm -	58,5	M36X2	27	M18X1,5	10	12	kg 0,25	NC16L03S001
		Psi 6090	inch -	2,30		1,06		0,39	0,47	lb 0,55	
QC VGA 15L MALE		MPa 42	mm 43	70	-	27	M22X1,5	12	15	kg 0,253	NC15L03S002
		Psi 6090	inch 1,69	2,76		0,00		0,47	0,59	lb 0,56	
QC VGA 15L FEMALE		MPa 42	mm -	59,5	M36X2	27	M22X1,5	12	15	kg 0,251	NC16L03S002
		Psi 6090	inch -	2,34		1,06		0,47	0,59	lb 0,55	
QC VGA 18L MALE		MPa 42	mm 43	70	-	27	M26X1,5	15	18	kg 0,258	NC15L03S003
		Psi 6090	inch 1,69	2,76		0,00		0,59	0,71	lb 0,57	
QC VGA 18L FEMALE		MPa 42	mm -	59,5	M36X2	27	M26X1,5	15	18	kg 0,261	NC16L03S003
		Psi 6090	inch -	2,34		1,06		0,59	0,71	lb 0,58	



SCREW-TO-CONNECT-COUPPLINGS ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-L (DIN 2353)

CS
Carbon Steel


TYPE	DN	PN	ØA	C	z	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC VGA 18L MALE	20	MPa 42	mm 48	77	-	34	M26X1,5	15	18	kg 0,372	NC15L04S000
		Psi 6090	inch 1,89	3,03		0,00		0,59	0,71	lb 0,82	
QC VGA 18L FEMALE		MPa 42	mm -	76	M42X2	34	M26X1,5	15	18	kg 0,424	NC16L04S000
		Psi 6090	inch -	2,99		1,34		0,59	0,71	lb 0,93	
QC VGA 22L MALE		MPa 42	mm 48	79	-	34	M30X2	19	22	kg 0,375	NC15L04S001
		Psi 6090	inch 1,89	3,11		0,00		0,75	0,87	lb 0,83	
QC VGA 22L FEMALE		MPa 42	mm -	78	M42X2	34	M30X2	19	22	kg 0,854	NC16L04S001
		Psi 6090	inch -	3,07		1,34		0,75	0,87	lb 1,88	
QC VGA 22L MALE	25	MPa 35	mm 57	98,5	-	41	M30X2	19	22	kg 0,708	NC15L05S000
		Psi 5075	inch 2,24	3,88		0,00		0,75	0,87	lb 1,56	
QC VGA 22L FEMALE		MPa 35	mm -	95	M48X2	41	M30X2	19	22	kg 0,701	NC16L05S000
		Psi 5075	inch -	3,74		1,61		0,75	0,87	lb 1,55	
QC VGA 28L MALE		MPa 35	mm 57	98,5	-	41	M36X2	24	28	kg 0,707	NC15L05S001
		Psi 5075	inch 2,24	3,88		0,00		0,94	1,10	lb 1,56	
QC VGA 28L FEMALE		MPa 35	mm -	95	M48X2	41	M36X2	24	28	kg 0,7	NC16L05S001
		Psi 5075	inch -	3,74		1,61		0,94	1,10	lb 1,54	
QC VGA 35L MALE		MPa 35	mm 57	100	-	46	M45X2	30	35	kg 0,784	NC15L05S002
		Psi 5075	inch 2,24	3,94		0,00		1,18	1,38	lb 1,73	
QC VGA 35L FEMALE		MPa 35	mm -	97	M48X2	46	M45X2	30	35	kg 0,777	NC16L05S002
		Psi 5075	inch -	3,82		1,81		0,00	1,38	lb 1,71	
QC VGA 35L MALE	31,5	MPa 30	mm 85	114	-	55	M45X2	30	35	kg 2,078	NC15L06S000
		Psi 4350	inch 3,35	4,49		0,00		1,18	1,38	lb 4,58	
QC VGA 35L FEMALE		MPa 30	mm -	111	M70X3	55	M45X2	30	35	kg 1,623	NC16L06S000
		Psi 4350	inch -	4,37		2,17		1,18	1,38	lb 3,58	
QC VGA 42L MALE		MPa 30	mm 85	114	-	55	M52X2	36	42	kg 2,15	NC15L06S001
		Psi 4350	inch 3,35	4,49		0,00		1,42	1,65	lb 4,74	
QC VGA 42L FEMALE		MPa 30	mm -	111	M70X3	55	M52X2	36	42	kg 1,773	NC16L06S001
		Psi 4350	inch -	4,37		2,17		1,42	1,65	lb 3,91	



SCREW-TO-CONNECT-COUPPLINGS ISO 14541 (male / female)
MALE THREAD METRIC ISO 8434-1-S (DIN 2353) BULKHEAD

CS
Carbon Steel

TYPE	DN	PN	ØA	C	z	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC VGA 10S BK MALE	12,5	MPa 42	mm 43	85	-	27	M18X1,5	7	10	kg 0,453	NC15I030000
		Psi 6090	inch 1,69	3,35		1,06		0,28	0,39	lb 1,00	
QC VGA 10S BK FEMALE		MPa 42	mm -	74,5	M36X2	27	M18X1,5	7	10	kg 0,271	NC16I030000
		Psi 6090	inch -	2,93		1,06		0,28	0,39	lb 0,60	
QC VGA 12S BK MALE		MPa 42	mm 43	85	-	27	M20X1,5	8	12	kg 0,457	NC15I030001
		Psi 6090	inch 1,69	3,35		1,06		0,31	0,47	lb 1,01	
QC VGA 12S BK FEMALE		MPa 42	mm -	74,5	M36X2	27	M20X1,5	8	12	kg 0,275	NC16I030001
		Psi 6090	inch -	2,93		1,06		0,31	0,47	lb 0,61	
QC VGA 16S BK MALE	20	MPa 42	mm 43	87	-	27	M24X1,5	12	16	kg 0,471	NC15I030002
		Psi 6090	inch 1,69	3,43		1,06		0,47	0,63	lb 1,04	
QC VGA 16S BK FEMALE		MPa 42	mm -	76,5	M36X2	27	M24X1,5	12	16	kg 0,283	NC16I030002
		Psi 6090	inch -	3,01		1,06		0,47	0,63	lb 0,62	
QC VGA 16S BK MALE		MPa 42	mm 48	94	-	34	M24X1,5	12	16	kg 0,674	NC15I040000
		Psi 6090	inch 1,89	3,70		1,34		0,47	0,63	lb 1,49	
QC VGA 16S BK FEMALE		MPa 42	mm -	93	M42X2	34	M24X1,5	12	16	kg 0,447	NC16I040000
		Psi 6090	inch -	3,66		1,34		0,47	0,63	lb 0,99	
QC VGA 20S BK MALE	25	MPa 42	mm 48	103	-	34	M30X2	16	20	kg 0,716	NC15I040001
		Psi 6090	inch 1,89	4,06		1,34		0,63	0,79	lb 1,58	
QC VGA 20S BK FEMALE		MPa 42	mm -	102	M42X2	34	M30X2	16	20	kg 0,484	NC16I040001
		Psi 6090	inch -	4,02		1,34		0,63	0,79	lb 1,07	
QC VGA 20S BK MALE		MPa 35	mm 57	122,5	-	41	M30X2	16	20	kg 1,217	NC15I050000
		Psi 5075	inch 2,24	4,82		1,61		0,63	0,79	lb 2,68	
QC VGA 20S BK FEMALE	25	MPa 35	mm -	119	M48X2	41	M30X2	16	20	kg 0,749	NC16I050000
		Psi 5075	inch -	4,69		1,61		0,63	0,79	lb 1,65	
QC VGA 25S BK MALE		MPa 35	mm 57	122,5	-	41	M36X2	20	25	kg 1,398	NC15I050001
		Psi 5075	inch 2,24	4,82		1,61		0,79	0,98	lb 3,08	
QC VGA 25S BK FEMALE		MPa 35	mm -	119	M48X2	41	M36X2	20	25	kg 0,84	NC16I050001
		Psi 5075	inch -	4,69		1,61		0,79	0,98	lb 1,85	
QC VGA 30S BK MALE	31,5	MPa 35	mm 57	124,5	-	46	M42X2	25	30	kg 1,566	NC15I050002
		Psi 5075	inch 2,24	4,90		1,81		0,98	1,18	lb 3,45	
QC VGA 30S BK FEMALE		MPa 35	mm -	121	M48X2	46	M42X2	25	30	kg 0,948	NC16I050002
		Psi 5075	inch -	4,76		1,81		0,98	1,18	lb 2,09	
QC VGA 30S MALE		MPa 30	mm 85	138		55	M42X2	25	30	kg 2,146	NC15I060000
		Psi 4350	inch 3,35	5,43		0,00		0,98	1,18	lb 4,73	
QC VGA 30S FEMALE	31,5	MPa 30	mm -	134,5	M70X3	55	M42X2	25	30	kg 1,691	NC16I060000
		Psi 4350	inch -	5,30		2,17		0,98	1,18	lb 3,73	
QC VGA 38S MALE		MPa 30	mm 85	149		55	M52X2	32	38,3	kg 2,389	NC15I060001
		Psi 4350	inch 3,35	5,87		0,00		1,26	1,51	lb 5,27	
QC VGA 38S FEMALE		MPa 30	mm -	145,5	M70X3	55	M52X2	32	38,3	kg 1,934	NC16I060001
		Psi 4350	inch -	5,73		2,17		1,26	1,51	lb 4,26	




SCREW-TO-CONNECT-COUPPLINGS ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-S (DIN 2353) BULKHEAD

SS

Stainless Steel

TYPE	DN	PN	ØA	C	z	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC VGA 10S BK MALE	12,5	MPa 42	mm 43	85	-	27	M18X1,5	7	10	kg 0,453	NC15I03S000
		Psi 6090	inch 1,69	3,35		1,06		0,28	0,39	lb 1,00	
QC VGA 10S BK FEMALE		MPa 42	mm -	74,5	M36X2	27	M18X1,5	7	10	kg 0,271	NC16I03S000
		Psi 6090	inch -	2,93		1,06		0,28	0,39	lb 0,60	
QC VGA 12S BK MALE		MPa 42	mm 43	85	-	27	M20X1,5	8	12	kg 0,457	NC15I03S001
		Psi 6090	inch 1,69	3,35		1,06		0,31	0,47	lb 1,01	
QC VGA 12S BK FEMALE		MPa 42	mm -	74,5	M36X2	27	M20X1,5	8	12	kg 0,275	NC16I03S001
		Psi 6090	inch -	2,93		1,06		0,31	0,47	lb 0,61	
QC VGA 16S BK MALE	20	MPa 42	mm 43	87	-	27	M24X1,5	12	16	kg 0,471	NC15I03S002
		Psi 6090	inch 1,69	3,43		1,06		0,47	0,63	lb 1,04	
QC VGA 16S BK FEMALE		MPa 42	mm -	76,5	M36X2	27	M24X1,5	12	16	kg 0,283	NC16I03S002
		Psi 6090	inch -	3,01		1,06		0,47	0,63	lb 0,62	
QC VGA 16S BK MALE		MPa 42	mm 48	94	-	34	M24X1,5	12	16	kg 0,674	NC15I04S000
		Psi 6090	inch 1,89	3,70		1,34		0,47	0,63	lb 1,49	
QC VGA 16S BK FEMALE		MPa 42	mm -	93	M42X2	34	M24X1,5	12	16	kg 0,447	NC16I04S000
		Psi 6090	inch -	3,66		1,34		0,47	0,63	lb 0,99	
QC VGA 20S BK MALE	25	MPa 42	mm 48	103	-	34	M30X2	16	20	kg 0,716	NC15I04S001
		Psi 6090	inch 1,89	4,06		1,34		0,63	0,79	lb 1,58	
QC VGA 20S BK FEMALE		MPa 42	mm -	102	M42X2	34	M30X2	16	20	kg 0,484	NC16I04S001
		Psi 6090	inch -	4,02		1,34		0,63	0,79	lb 1,07	
QC VGA 20S BK MALE		MPa 35	mm 57	122,5	-	41	M30X2	16	20	kg 1,217	NC15I05S000
		Psi 5075	inch 2,24	4,82		1,61		0,63	0,79	lb 2,68	
QC VGA 20S BK FEMALE	25	MPa 35	mm -	119	M48X2	41	M30X2	16	20	kg 0,749	NC16I05S000
		Psi 5075	inch -	4,69		1,61		0,63	0,79	lb 1,65	
QC VGA 25S BK MALE		MPa 35	mm 57	122,5	-	41	M36X2	20	25	kg 1,398	NC15I05S001
		Psi 5075	inch 2,24	4,82		1,61		0,79	0,98	lb 3,08	
QC VGA 25S BK FEMALE		MPa 35	mm -	119	M48X2	41	M36X2	20	25	kg 0,84	NC16I05S001
		Psi 5075	inch -	4,69		1,61		0,79	0,98	lb 1,85	
QC VGA 30S BK MALE	31,5	MPa 35	mm 57	124,5	-	46	M42X2	25	30	kg 1,566	NC15I05S002
		Psi 5075	inch 2,24	4,90		1,81		0,98	1,18	lb 3,45	
QC VGA 30S BK FEMALE		MPa 35	mm -	121	M48X2	46	M42X2	25	30	kg 0,948	NC16I05S002
		Psi 5075	inch -	4,76		1,81		0,98	1,18	lb 2,09	
QC VGA 30S MALE		MPa 30	mm 85	138	-	55	M42X2	25	30	kg 2,146	NC15I06S000
		Psi 4350	inch 3,35	5,43		2,17		0,98	1,18	lb 4,73	
QC VGA 30S FEMALE	31,5	MPa 30	mm -	134,5	M70X3	55	M42X2	25	30	kg 1,691	NC16I06S000
		Psi 4350	inch -	5,30		2,17		0,98	1,18	lb 3,73	
QC VGA 38S MALE		MPa 30	mm 85	149	-	55	M52X2	32	38,3	kg 2,389	NC15I06S001
		Psi 4350	inch 3,35	5,87		2,17		1,26	1,51	lb 5,27	
QC VGA 38S FEMALE		MPa 30	mm -	145,5	M70X3	55	M52X2	32	38,3	kg 1,934	NC16I06S001
		Psi 4350	inch -	5,73		2,17		1,26	1,51	lb 4,26	




SCREW-TO-CONNECT-COUPPLINGS ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-L (DIN 2353) BULKHEAD

CS

Carbon Steel

TYPE	DN	PN	ØA	C	z	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC VGA 8L BK MALE	10	MPa 42	mm 34	82	-	24	M14X1,5	6	8	kg 0,173	NC15M020000
		Psi 6090	inch 1,34	3,23		0,94		0,24	0,31	lb 0,38	
QC VGA 8L BK FEMALE		MPa 42	mm -	75,5	M28X2	24	M14X1,5	6	8	kg 0,161	NC16M020000
		Psi 6090	inch -	2,97		0,94		0,24	0,31	lb 0,35	
QC VGA 10L BK MALE		MPa 42	mm 34	83	-	24	M16X1,5	8	10	kg 0,175	NC15M020001
		Psi 6090	inch 1,34	3,27		0,94		0,31	0,39	lb 0,39	
QC VGA 10L BK FEMALE	12,5	MPa 42	mm -	76,5	M28X2	24	M16X1,5	8	10	kg 0,178	NC16M020001
		Psi 6090	inch -	3,01		0,94		0,31	0,39	lb 0,39	
QC VGA 10L BK MALE		MPa 42	mm 43	84	-	27	M16X1,5	8	10	kg 0,261	NC15M030000
		Psi 6090	inch 1,69	3,31		1,06		0,31	0,39	lb 0,58	
QC VGA 10L BK FEMALE		MPa 42	mm -	73,5	M36X2	27	M16X1,5	8	10	kg 0,289	NC16M030000
		Psi 6090	inch -	2,89		1,06		0,31	0,39	lb 0,64	
QC VGA 12L BK MALE		MPa 42	mm 43	85	-	27	M18X1,5	10	12	kg 0,263	NC15M030001
		Psi 6090	inch 1,69	3,35		1,06		0,39	0,47	lb 0,58	
QC VGA 12L BK FEMALE		MPa 42	mm -	74,5	M36X2	27	M18X1,5	10	12	kg 0,266	NC16M030001
		Psi 6090	inch -	2,93		1,06		0,39	0,47	lb 0,59	
QC VGA 15L BK MALE		MPa 42	mm 43	85	-	27	M22X1,5	12	15	kg 0,271	NC15M030002
		Psi 6090	inch 1,69	3,35		1,06		0,47	0,59	lb 0,60	
QC VGA 15L BK FEMALE		MPa 42	mm -	74,5	M36X2	27	M22X1,5	12	15	kg 0,274	NC16M030002
		Psi 6090	inch -	2,93		1,06		0,47	0,59	lb 0,60	
QC VGA 18L BK MALE		MPa 42	mm 43	85	-	27	M26X1,5	15	18	kg 0,279	NC15M030003
		Psi 6090	inch 1,69	3,35		1,06		0,59	0,71	lb 0,62	
QC VGA 18L BK FEMALE		MPa 42	mm -	74,5	M36X2	27	M26X1,5	15	18	kg 0,282	NC16M030003
		Psi 6090	inch -	2,93		1,06		0,59	0,71	lb 0,62	
QC VGA 15L BK MALE	20	MPa 42	mm 48	92	-	34	M22X1,5	12	15	kg 0,385	NC15M040000
		Psi 6090	inch 1,89	3,62		1,34		0,47	0,59	lb 0,85	
QC VGA 15L BK FEMALE		MPa 42	mm -	91	M42X2	34	M22X1,5	12	15	kg 0,438	NC16M040000
		Psi 6090	inch -	3,58		1,34		0,47	0,59	lb 0,97	
QC VGA 18L BK MALE		MPa 42	mm 48	92	-	34	M26X1,5	15	18	kg 0,398	NC15M040001
		Psi 6090	inch 1,89	3,62		1,34		0,59	0,71	lb 0,88	
QC VGA 18L BK FEMALE		MPa 42	mm -	91	M42X2	34	M26X1,5	15	18	kg 0,446	NC16M040001
		Psi 6090	inch -	3,58		1,34		0,59	0,71	lb 0,98	
QC VGA 22L BK MALE		MPa 42	mm 48	99	-	34	M30X2	19	22	kg 0,413	NC15M040002
		Psi 6090	inch 1,89	3,90		1,34		0,75	0,87	lb 0,91	
QC VGA 22L BK FEMALE		MPa 42	mm -	98	M42X2	34	M30X2	19	22	kg 0,466	NC16M040002
		Psi 6090	inch -	3,86		1,34		0,75	0,87	lb 1,03	
QC VGA 22L BK MALE	25	MPa 35	mm 57	118,5	-	41	M30X2	19	22	kg 0,767	NC15M050000
		Psi 5075	inch 2,24	4,67		1,61		0,75	0,87	lb 1,69	
QC VGA 22L BK FEMALE		MPa 35	mm -	115	M48x2	41	M30X2	19	22	kg 0,764	NC16M050000
		Psi 5075	inch -	4,53		1,61		0,75	0,87	lb 1,68	
QC VGA 28L BK MALE		MPa 35	mm 57	118,5	-	41	M36X2	24	28	kg 0,786	NC15M050001
		Psi 5075	inch 2,24	4,67		1,61		0,94	1,10	lb 1,73	
QC VGA 28L BK FEMALE	31,5	MPa 35	mm -	115	M48x2	41	M36X2	24	28	kg 0,784	NC16M050001
		Psi 5075	inch -	4,53		1,61		0,94	1,10	lb 1,73	
QC VGA 35L MALE		MPa 30	mm 85	122	-	55	M45X2	30	35	kg 2,111	NC15M060000
		Psi 4350	inch 3,35	4,80		0,00		1,18	1,38	lb 4,65	
QC VGA 35L FEMALE		MPa 30	mm -	119	M70X3	55	M45X2	30	35	kg 1,656	NC16M060000
		Psi 4350	inch -	4,69		2,17		1,18	1,38	lb 3,65	
QC VGA 42L MALE		MPa 30	mm 85	129	-	55	M52X2	36	42	kg 2,14	NC15M060001
		Psi 4350	inch 3,35	5,08		0,00		1,42	1,65	lb 4,72	
QC VGA 42L FEMALE	31,5	MPa 30	mm -	126	M70X3	55	M52X2	36	42	kg 1,684	NC16M060001
		Psi 4350	inch -	4,96		2,17		1,42	1,65	lb 3,71	



SCREW-TO-CONNECT-COUPPLINGS ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-L (DIN 2353) BULKHEAD

SS
Stainless Steel

TYPE	DN	PN	ØA	C	z	ch	ØM	ØLW	ØPA	WEIGHT	ITEM CODE
QC VGA 8L BK MALE	10	MPa 42	mm 34	82	-	24	M14X1,5	6	8	kg 0,173	NC15M02S000
		Psi 6090	inch 1,34	3,23		0,94		0,24	0,31	lb 0,38	
QC VGA 8L BK FEMALE		MPa 42	mm -	75,5	M28X2	24	M14X1,5	6	8	kg 0,161	NC16M02S000
		Psi 6090	inch -	2,97		0,94		0,24	0,31	lb 0,35	
QC VGA 10L BK MALE		MPa 42	mm 34	83	-	24	M16X1,5	8	10	kg 0,175	NC15M02S001
		Psi 6090	inch 1,34	3,27		0,94		0,31	0,39	lb 0,39	
QC VGA 10L BK FEMALE		MPa 42	mm -	76,5	M28X2	24	M16X1,5	8	10	kg 0,178	NC16M02S001
		Psi 6090	inch -	3,01		0,94		0,31	0,39	lb 0,39	
QC VGA 10L BK MALE	12,5	MPa 42	mm 43	84	-	27	M16X1,5	8	10	kg 0,261	NC15M03S000
		Psi 6090	inch 1,69	3,31		1,06		0,31	0,39	lb 0,58	
QC VGA 10L BK FEMALE		MPa 42	mm -	73,5	M36X2	27	M16X1,5	8	10	kg 0,289	NC16M03S000
		Psi 6090	inch -	2,89		1,06		0,31	0,39	lb 0,64	
QC VGA 12L BK MALE		MPa 42	mm 43	85	-	27	M18X1,5	10	12	kg 0,263	NC15M03S001
		Psi 6090	inch 1,69	3,35		1,06		0,39	0,47	lb 0,58	
QC VGA 12L BK FEMALE		MPa 42	mm -	74,5	M36X2	27	M18X1,5	10	12	kg 0,266	NC16M03S001
		Psi 6090	inch -	2,93		1,06		0,39	0,47	lb 0,59	
QC VGA 15L BK MALE		MPa 42	mm 43	85	-	27	M22X1,5	12	15	kg 0,271	NC15M03S002
		Psi 6090	inch 1,69	3,35		1,06		0,47	0,59	lb 0,60	
QC VGA 15L BK FEMALE		MPa 42	mm -	74,5	M36X2	27	M22X1,5	12	15	kg 0,274	NC16M03S002
		Psi 6090	inch -	2,93		1,06		0,47	0,59	lb 0,60	
QC VGA 18L BK MALE		MPa 42	mm 43	85	-	27	M26X1,5	15	18	kg 0,279	NC15M03S003
		Psi 6090	inch 1,69	3,35		1,06		0,59	0,71	lb 0,62	
QC VGA 18L BK FEMALE		MPa 42	mm -	74,5	M36X2	27	M26X1,5	15	18	kg 0,282	NC16M03S003
		Psi 6090	inch -	2,93		1,06		0,59	0,71	lb 0,62	
QC VGA 15L BK MALE		MPa 42	mm 48	92	-	34	M22X1,5	12	15	kg 0,385	NC15M04S000
		Psi 6090	inch 1,89	3,62		1,34		0,47	0,59	lb 0,85	
QC VGA 15L BK FEMALE		MPa 42	mm -	91	M42X2	34	M22X1,5	12	15	kg 0,438	NC16M04S000
		Psi 6090	inch -	3,58		1,34		0,47	0,59	lb 0,97	
QC VGA 18L BK MALE	20	MPa 42	mm 48	92	-	34	M26X1,5	15	18	kg 0,398	NC15M04S001
		Psi 6090	inch 1,89	3,62		1,34		0,59	0,71	lb 0,88	
QC VGA 18L BK FEMALE		MPa 42	mm -	91	M42X2	34	M26X1,5	15	18	kg 0,446	NC16M04S001
		Psi 6090	inch -	3,58		1,34		0,59	0,71	lb 0,98	
QC VGA 22L BK MALE		MPa 42	mm 48	99	-	34	M30X2	19	22	kg 0,413	NC15M04S002
		Psi 6090	inch 1,89	3,90		1,34		0,75	0,87	lb 0,91	
QC VGA 22L BK FEMALE		MPa 42	mm -	98	M42X2	34	M30X2	19	22	kg 0,466	NC16M04S002
		Psi 6090	inch -	3,86		1,34		0,75	0,87	lb 1,03	
QC VGA 22L BK MALE	25	MPa 35	mm 57	118,5	-	41	M30X2	19	22	kg 0,767	NC15M05S000
		Psi 5075	inch 2,24	4,67		1,61		0,75	0,87	lb 1,69	
QC VGA 22L BK FEMALE		MPa 35	mm -	115	M48x2	41	M30X2	19	22	kg 0,764	NC16M05S000
		Psi 5075	inch -	4,53		1,61		0,75	0,87	lb 1,68	
QC VGA 28L BK MALE		MPa 35	mm 57	118,5	-	41	M36X2	24	28	kg 0,786	NC15M05S001
		Psi 5075	inch 2,24	4,67		1,61		0,94	1,10	lb 1,73	
QC VGA 28L BK FEMALE		MPa 35	mm -	115	M48x2	41	M36X2	24	28	kg 0,784	NC16M05S001
		Psi 5075	inch -	4,53		1,61		0,94	1,10	lb 1,73	
QC VGA 35L MALE	31,5	MPa 30	mm 85	122	-	55	M45X2	30	35	kg 2,111	NC15M06S000
		Psi 4350	inch 3,35	4,80		0,00		1,18	1,38	lb 4,65	
QC VGA 35L FEMALE		MPa 30	mm -	119	M70X3	55	M45X2	30	35	kg 1,656	NC16M06S000
		Psi 4350	inch -	4,69		2,17		1,18	1,38	lb 3,65	
QC VGA 42L MALE		MPa 30	mm 85	129	-	55	M52X2	36	42	kg 2,14	NC15M06S001
		Psi 4350	inch 3,35	5,08		0,00		1,42	1,65	lb 4,72	
QC VGA 42L FEMALE		MPa 30	mm -	126	M70X3	55	M52X2	36	42	kg 1,684	NC16M06S001
		Psi 4350	inch -	4,96		2,17		1,42	1,65	lb 3,71	