


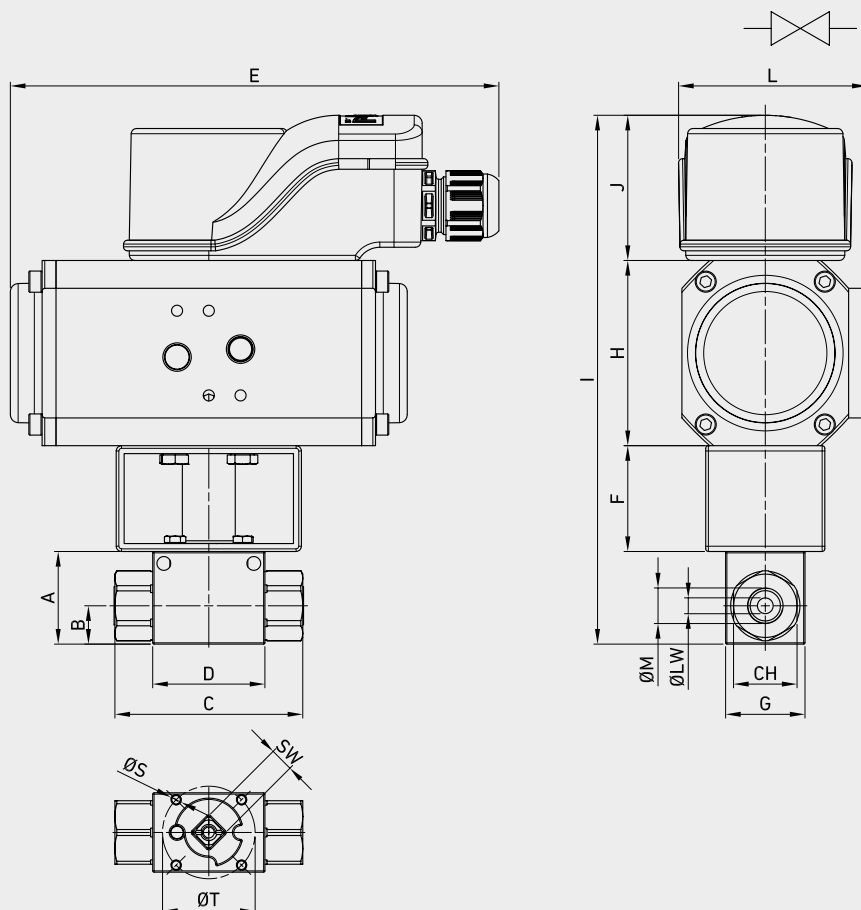

## FOR FIRE FIGHTING

| TYPE / ITEM CODE                            | DN | A    | B    | C     | D     | E    | F    | G    | H    | I    | J     | L    | ØM   | CH      | ØS | ØT | ISO 5211 | SW  | ØLW  |      |
|---------------------------------------------|----|------|------|-------|-------|------|------|------|------|------|-------|------|------|---------|----|----|----------|-----|------|------|
| * Wwith PNEUMATIC ACTUATOR and LIMIT SWITCH |    |      |      |       |       |      |      |      |      |      |       |      |      |         |    |    |          |     |      |      |
| GE2 G 1/8*                                  | 4  | mm   | 35   | 14,5  | 71    | 42,4 | 185  | 40   | 30   | 70   | 200   | 55   | 72   | G 1/8   | 24 | M4 | 35       | F03 | 9    | 4    |
|                                             |    | inch | 1,38 | 0,57  | 2,80  | 1,67 | 7,28 | 1,57 | 1,18 | 2,76 | 7,87  | 2,17 | 2,83 |         |    |    | 1,38     |     | 0,35 | 0,16 |
| GE2 G 1/4*                                  | 6  | mm   | 35   | 14,5  | 71    | 42,4 | 185  | 40   | 30   | 70   | 200   | 55   | 72   | G 1/4   | 24 | M4 | 35       | F03 | 9    | 6    |
|                                             |    | inch | 1,38 | 0,57  | 2,80  | 1,67 | 7,28 | 1,57 | 1,18 | 2,76 | 7,87  | 2,17 | 2,83 |         |    |    | 1,38     |     | 0,35 | 0,24 |
| GE2 G 3/8*                                  | 10 | mm   | 40   | 17,4  | 73    | 44,4 | 185  | 40   | 35   | 70   | 205   | 55   | 72   | G 3/8   | 30 | M5 | 36       | F03 | 9    | 10   |
|                                             |    | inch | 1,57 | 0,69  | 2,87  | 1,75 | 7,28 | 1,57 | 1,38 | 2,76 | 8,07  | 2,17 | 2,83 |         |    |    | 1,42     |     | 0,35 | 0,39 |
| GE2 G 1/2*                                  | 13 | mm   | 43   | 19,65 | 83    | 48,4 | 185  | 40   | 37   | 70   | 208   | 55   | 72   | G 1/2   | 32 | M5 | 36       | F03 | 9    | 13   |
|                                             |    | inch | 1,69 | 0,77  | 3,27  | 1,91 | 7,28 | 1,57 | 1,46 | 2,76 | 8,19  | 2,17 | 2,83 |         |    |    | 1,42     |     | 0,35 | 0,51 |
| GE2 G 3/4*                                  | 20 | mm   | 57   | 25,4  | 95    | 62,5 | 213  | 40   | 49   | 118  | 270   | 55   | 113  | G 3/4   | 41 | M6 | 50       | F05 | 14   | 20   |
|                                             |    | inch | 2,24 | 1,00  | 3,74  | 2,46 | 8,39 | 1,57 | 1,93 | 4,65 | 10,63 | 2,17 | 4,45 |         |    |    | 1,97     |     | 0,55 | 0,79 |
| GE2 G 1*                                    | 25 | mm   | 65   | 29,5  | 112,4 | 66,5 | 213  | 40   | 55   | 118  | 278   | 55   | 113  | G 1     | 50 | M6 | 50       | F05 | 14   | 25   |
|                                             |    | inch | 2,56 | 1,16  | 4,43  | 2,62 | 8,39 | 1,57 | 2,17 | 4,65 | 10,94 | 2,17 | 4,45 |         |    |    | 1,97     |     | 0,55 | 0,98 |
| GE2 G 1 1/4 R*                              | 25 | mm   | 65   | 29,5  | 120,4 | 66,5 | 213  | 40   | 55   | 118  | 278   | 55   | 113  | G 1 1/4 | 55 | M6 | 50       | F05 | 14   | 25   |
|                                             |    | inch | 2,56 | 1,16  | 4,74  | 2,62 | 8,39 | 1,57 | 2,17 | 4,65 | 10,94 | 2,17 | 4,45 |         |    |    | 1,97     |     | 0,55 | 0,98 |
| GE2 G 1 1/2 R*                              | 25 | mm   | 65   | 29,5  | 124,4 | 66,5 | 213  | 40   | 55   | 118  | 278   | 55   | 113  | G 1 1/2 | 60 | M6 | 50       | F05 | 14   | 25   |
|                                             |    | inch | 2,56 | 1,16  | 4,90  | 2,62 | 8,39 | 1,57 | 2,17 | 4,65 | 10,94 | 2,17 | 4,45 |         |    |    | 1,97     |     | 0,55 | 0,98 |

On request, VDS and FM approvals could be available